


Telescopic Fork Mounted Jibs

- ▲ Convert a forklift truck into a mobile crane to reach and transport long and awkward loads from inaccessible location.
- ▲ Verify load centre of forklift truck.
- ▲ Safety chain wedge to boom has grab hools for anchoring job boom to forklift truck.
- ▲ Zinc plated fork heels pin for safe forklift attachment.
- ▲ Supplied complete with one safety swived hook with bow shackle and one rigid hook.

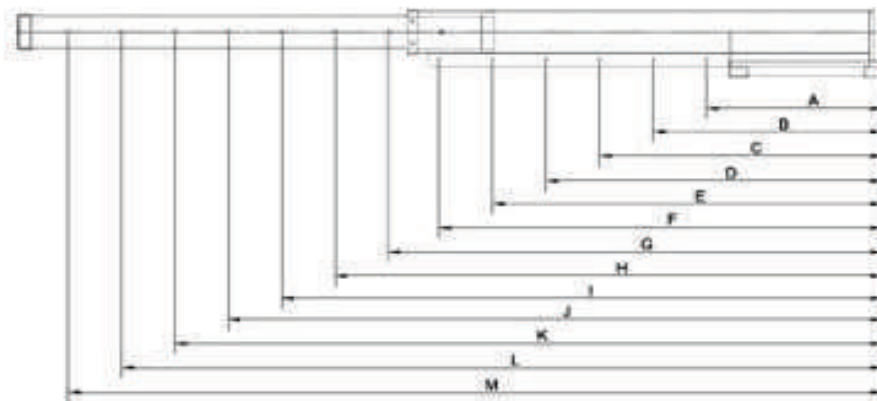

| Positions | Model TLB03 | | | | | | | | | | | | |
|---------------|----------------|------|------|------|------|------|------|------|------|------|------|------|------|
| | A | B | C | D | E | F | G | H | I | J | K | L | M |
| Capacity (kg) | 755 | 985 | 1215 | 1445 | 1675 | 1905 | 2125 | 2355 | 2580 | 2810 | 3040 | 3270 | 3500 |
| | 3000 | 2300 | 1865 | 1570 | 1355 | 1190 | 1065 | 960 | 875 | 805 | 745 | 690 | 640 |

SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTICE

รายละเอียดผลิตภัณฑ์อาจมีการเปลี่ยนแปลงโดยมิได้แจ้งให้ทราบล่วงหน้า

Drum Handler

- ▲ Carry one or two drums by the automatic grip lock, maintains a positive grip over rough floor surface.
- ▲ The Gator Grip out lock feature will not open and ensures safe secure drum transport.
- ▲ Grip head has different position to fit different height.
- ▲ Easily carry and have much more safety.



DG 360



DG 720

| TECHNICAL DATA | | MODEL | |
|----------------|--------|--------|--------|
| | | DG 360 | DG 720 |
| Capacity | kg | 360 | 720 |
| Drum Size | gallon | 55 | 55 x 2 |
| Fork Opening | mm | 560 | 605 |
| Overall Length | mm | 830 | 1030 |
| Overall Width | mm | 710 | 850 |
| Overall Height | mm | 1000 | |
| Net Weight | kg | 60 | 96 |

SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTICE

รายละเอียดผลิตภัณฑ์อาจมีการเปลี่ยนแปลงโดยมิได้แจ้งให้ทราบล่วงหน้า

Fork Extensions

- ▲ The simple but effective way of lengthening your forks to handle longer loads safely, without damage to the load.
- ▲ Heavy duty steel construction, fit onto forks up to 50mm (2") thickness.
- ▲ Steel retaining strap prevents forks extensions from sliding off forks during use.
- ▲ Sold in pair only.



| Model | Length of Extension | | Fit Fork Width | | Net Weight |
|--------|---------------------|------|----------------|-----|------------|
| | inch | mm | inch | mm | kg |
| EX 484 | 48 | 1219 | 4 | 100 | 35 |
| EX 604 | 60 | 1525 | 4 | 100 | 44 |
| EX 724 | 72 | 1830 | 4 | 100 | 53 |
| EX 844 | 84 | 2134 | 4 | 100 | 62 |
| EX 964 | 96 | 2435 | 4 | 100 | 70 |
| EX 485 | 48 | 1219 | 5 | 125 | 39 |
| EX 605 | 60 | 1525 | 5 | 125 | 49 |
| EX 725 | 72 | 1830 | 5 | 125 | 59 |
| EX 824 | 82 | 2085 | 4 | 100 | 60 |
| EX 825 | 82 | 2085 | 5 | 125 | 67 |
| EX 845 | 84 | 2134 | 5 | 125 | 69 |
| EX 965 | 96 | 2435 | 5 | 125 | 79 |
| EX 486 | 48 | 1219 | 6 | 150 | 43 |
| EX 606 | 60 | 1525 | 6 | 150 | 53 |
| EX 726 | 72 | 1830 | 6 | 150 | 64 |
| EX 846 | 84 | 2134 | 6 | 150 | 75 |
| EX 966 | 96 | 2435 | 6 | 150 | 85 |

SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTICE

Fork Hook



- ▲ Converts forklift into a mobile crane in seconds.
- ▲ Adjustable along the length of the fork.
- ▲ Secured to forks by thumb screw.
- ▲ Swivel hook includes safety latch.



PMK 1000



PMK 2500

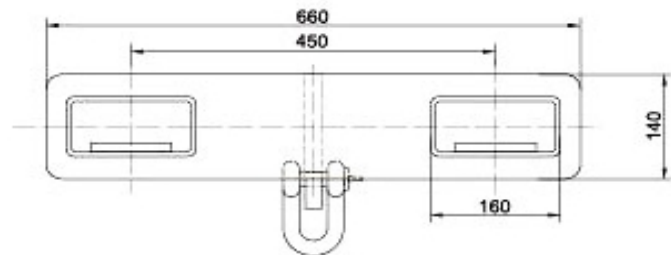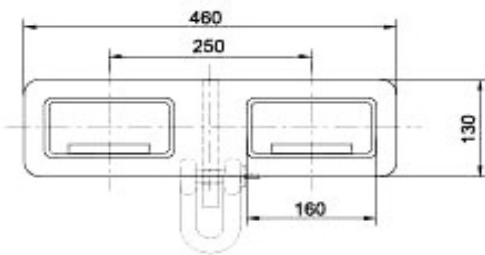

| TECHNICAL DATA | | MODEL | |
|--|----|----------|----------|
| | | MK 10 | MK 25 |
| Capacity | kg | 1000 | 2500 |
| Max. Fork Section | mm | 160 x 60 | 160 x 60 |
| Net Weight | kg | 14 | 25 |
| SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTICE | | | |

รายละเอียดผลิตภัณฑ์อาจมีการเปลี่ยนแปลงโดยมิได้แจ้งให้ทราบล่วงหน้า

Fork Maintenance Platform

- ▲ For overhead access and maintenance with safety.
- ▲ Spring loaded inward opening door with safety latch for safety entry.
- ▲ Unit is secured to the fork with heel pins and chain.
- ▲ Slip-resistant floor with drainage holes.
- ▲ Conform to Health and safety Guidanle mte PM28 and GN48 standard.
- ▲ Less storage space, portable and easy to assemble.
- ▲ Wheel fitted for easy manoeuvring.



| TECHNICAL DATA | | MODEL | | |
|--|----|---------|-----------|-----------|
| | | NK 30 A | NK 30 B | NK 30 C |
| Max. Capacity | kg | 300 | 300 | 300 |
| Deck Size | mm | 950x950 | 1200x1000 | 1000x1000 |
| Max. Height | mm | 2000 | 2000 | 2000 |
| Fork Spread | kg | 600/690 | 600/690 | 600/690 |
| SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTICE | | | | |

รายละเอียดผลิตภัณฑ์อาจมีการเปลี่ยนแปลงโดยมิได้แจ้งให้ทราบล่วงหน้า