

Electric Order Picker



รายละเอียดผลิตภัณฑ์อาจมีการเปลี่ยนแปลงโดยมิได้แจ้งให้ทราบล่วงหน้า

TECHNICAL DATA		MODEL	
		FT 200	FT 200 A
Lowered Table Height	(mm)	480	550
Raised Table Height	(mm)	2720	3500
Platform Size	(mm)	640×600	640×600
Power Unit	(W)	DC 800	DC 800
Battery (service free)	(Ah/V)	85/12	85/12
Overall Size	(mm)	1455×740×1780	1455×740×2100
Net Weight	(kg)	303	273
SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTICE			

Electric Aerial Order Picker (Trinal Mast)***ZDYT 3 - 3.5 , ZDYT 3 - 4.0 , ZDYT 3 - 4.5***

รายละเอียดผลิตภัณฑ์อาจมีการเปลี่ยนแปลงโดยมิได้แจ้งให้ทราบล่วงหน้า



Electric Aerial Order Picker

ZDYT (Trinal masts)

ZDYT3-3.5/ZDYT3-4.0/ZDYT3-4.5


	S.W.L.....300 kg		Batteries.....2X12V/120Ah Integrated charger.....24V/12A
	Working height ZDYT3-3.55.50m ZDYT3-4.06.00m ZDYT3-4.56.50m		Gradeability.....25%
	Platform floor height ZDYT3-3.53.50m ZDYT3-4.04.00m ZDYT3-4.54.50m		Tyres Drive motorsφ230X80mm Front wheels.....6 in
	Overall length.....1.53m Overall width.....0.70m Overall height ZDYT3-3.51.64m ZDYT3-4.01.81m ZDYT3-4.51.98m Platform size.....0.90 X 0.64m Ground clearance.....0.05m Wheelbase.....1.24m Turning radius.....0		Weight ZDYT3-3.5655kg ZDYT3-4.0665kg ZDYT3-4.5675kg
	Drive motors.....2X24VDC/0.4kw Lifting motor.....24VDC/2kw	Standard equipment	
	Travel speed Stowed.....4 km/h Raised.....1.1 km/h	- Can Bus Technology - Proportional controls - Battery charge indicator - Forklift pockets - Safety brackets - Low voltage alarm - Emergency down button - Charger protection - Controller temperature protection - 2WD - Over loading limited	
	Up/Down speed ZDYT3-3.5.....17/19 sec ZDYT3-4.0.....20/22 sec ZDYT3-4.5.....23/25 sec		



ZDYT3-3.5 1.64m
ZDYT3-4.0 1.81m
ZDYT3-4.5 1.98m



0.70m

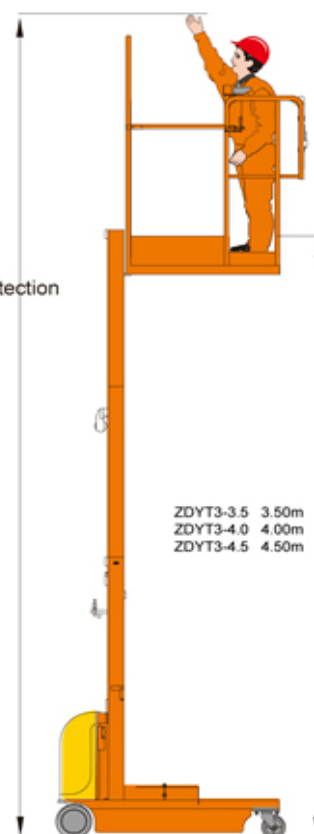

ZDYT3-3.5 5.50m
ZDYT3-4.0 6.00m
ZDYT3-4.5 6.50m

ZDYT3-3.5 3.50m
ZDYT3-4.0 4.00m
ZDYT3-4.5 4.50m

Semi Electric Aerial Order Picker (Trinal Mast)***DYT 2 - 3.5 , DYT 2 - 4.0 , DYT 2 - 4.5***

รายละเอียดผลิตภัณฑ์อาจมีการเปลี่ยนแปลงโดยมิได้แจ้งให้ทราบล่วงหน้า



Semi-Electric Aerial Order Picker

DYT (Trinal masts)



DYT2-3.5/DYT2-4.0/DYT2-4.5

	S.W.L.....200 kg		Up/Down speed
			DYT2-3.515/17 sec
			DYT2-4.018/20 sec
			DYT2-4.521/23 sec
	Working height		Batteries.....12V/120Ah
	DYT2-3.5.....5.50m		Integrated charger.....12V/15A
	DYT2-4.0.....6.00m		Tyres
	DYT2-4.5.....6.50m		Back wheels..... $\phi 150 \times 40$ mm
	Platform floor height		Front wheels.....5 in
	DYT2-3.5.....3.50m		Weight
	DYT2-4.0.....4.00m		DYT2-3.5.....265kg
	DYT2-4.5.....4.50m		DYT2-4.0.....315kg
	Overall length.....1.30m		DYT2-4.5.....365kg
	Overall width.....0.84m	Standard equipment	
	Overall height	- Emergency stop button	
	DYT2-3.5.....1.66m	- Battery charge indicator	
	DYT2-4.0.....1.83m	- Two brakes and two brake pads	
	DYT2-4.5.....1.99m	- Voltage indicator	
	Platform size.....0.90 X 0.60m	- Safety brackets	
	Ground clearance.....0.03m	- Emergency down button	
	Wheelbase0.77m	- Over loading limited	
	Lifting motor12VDC/1.5kw		

DYT2-3.5 5.50m
DYT2-4.0 6.00m
DYT2-4.5 6.50m



DYT2-3.5 1.66m
DYT2-4.0 1.83m
DYT2-4.5 1.99m



DYT2-3.5 3.50m
DYT2-4.0 4.00m
DYT2-4.5 4.50m

Mobile Aluminium Work Platform Single Mast (Light Duty)

EGTWY 6.5 - 1000 , EGTWY 8 - 1000



รายละเอียดผลิตภัณฑ์อาจมีการเปลี่ยนแปลงโดยมิได้แจ้งให้ทราบล่วงหน้า

LIFTKAZ

Product Catalog

Email : sales@liftkaz.com

www.liftkaz.com



Mobile Aluminium Work Platform Single Mast

EGTWY1000 (Light Duty)



Up/Down speed

EGTWY6.5-1000.....75/70 sec

EGTWY8-1000.....85/81 sec



Batteries.....1X12V/120Ah

Integrated charger.....12V/12A



Tyres

Back wheels.....φ250X75mm

Front wheels.....6 in



Weight

EGTWY6.5-1000.....310(AC)/365(DC) kg

EGTWY8-1000.....340(AC)/390(DC) kg

EGTWY6.5-1000/EGTWY8-1000



S.W.L.....125 kg



Working height

EGTWY6.5-1000.....8.50m

EGTWY8-1000.....10.00m

Platform floor height

EGTWY6.5-1000.....6.50m

EGTWY8-1000.....8.00m



Overall length.....1.20m

Overall width.....0.69m

Overall height.....1.98m

Platform size.....0.60X 0.60m

Ground clearance.....0.06m

Wheelbase.....1.07m







Lifting motor

AC.....110-230VAC/0.75kw

DC.....12VDC/1.5kw

Standard equipment

- Leveling outrigger device
- Emergency stop button
- Electric limit switch
- Easy loading in pickup trucks
- Emergency down button
- Leveling indicator
- Two controllers operation
- Over loading limited

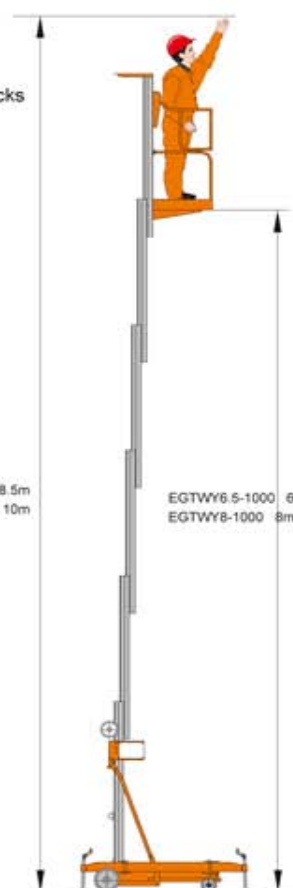EGTWY6.5-1000 8.5m
EGTWY8-1000 10mEGTWY6.5-1000 6.5m
EGTWY8-1000 8m

Mobile Aluminium Work Platform Single Mast

GTWY 6 - 1000 , GTWY 8 - 1000 , GTWY 10 - 1000



รายละเอียดผลิตภัณฑ์อาจมีการเปลี่ยนแปลงโดยมิได้แจ้งให้ทราบล่วงหน้า



Mobile Aluminium Work Platform Single Mast

GTWY1000

GTWY6-1000/GTWY8-1000/GTWY10-1000



S.W.L	
GTWY6-1000	150 kg
GTWY8-1000/GTWY10-1000	125 kg



Working height	
GTWY6-1000	8.00m
GTWY8-1000	10.00m
GTWY10-1000	12.00m
Platform floor height	
GTWY6-1000	6.00m
GTWY8-1000	8.00m
GTWY10-1000	10.00m



Overall length	1.42m
Overall width	0.84m
Overall height	
GTWY6-1000	1.92m
GTWY8-1000 /GTWY10-1000	1.98m
Platform size	0.63 X 0.65m
Ground clearance	0.06m
Wheelbase	1.11m



Lifting motor	
AC	110-230VAC/0.75kw
DC	12VDC/1.5kw



Up/Down speed	
GTWY6-1000	38/35 sec
GTWY8-1000	44/38 sec
GTWY10-1000	46/40 sec



Batteries	2X12V/150Ah
Integrated charger	12 V/15A





Tyres	
Back wheels	φ180X50mm
Front wheels	5 in



Weight	
GTWY6-1000	415(AC)/450(DC)kg
GTWY8-1000	450(AC)/485(DC)kg
GTWY10-1000	490(AC)/525(DC)kg


Standard equipment

- Leveling outrigger device
- Emergency stop button
- Battery charge indicator
- Electric limit switch
- Two controllers operation
- Emergency down button
- Leveling indicator
- Over loading limited

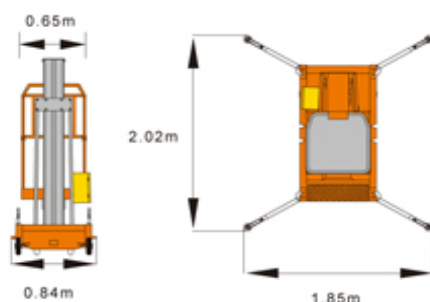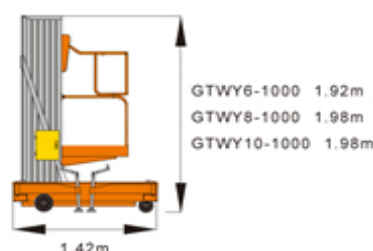

GTWY6-1000 8m
GTWY8-1000 10m
GTWY10-1000 12m

GTWY6-1000 6m
GTWY8-1000 8m
GTWY10-1000 10m

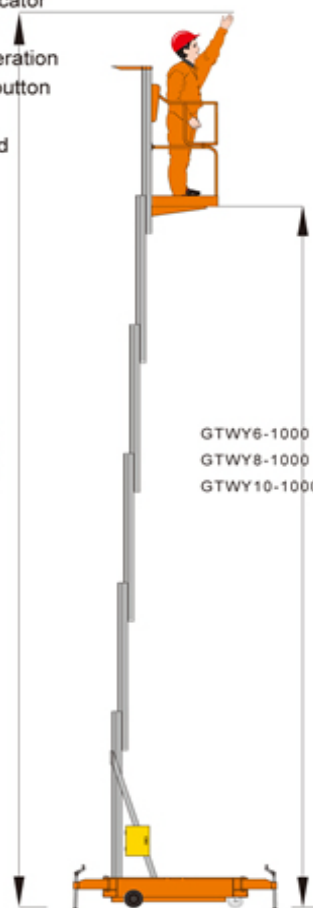

Mobile Aluminium Work Platform Dual Mast

GTWY 6 - 2000 , GTWY 8 - 2000 , GTWY 10 - 2000 . GTWY 12 - 2000



รายละเอียดผลิตภัณฑ์อาจมีการเปลี่ยนแปลงโดยมิได้แจ้งให้ทราบล่วงหน้า



Mobile Aluminium Work Platform Dual Mast

GTWY2000

GTWY6-2000 / GTWY8-2000 / GTWY10-2000 / GTWY12-2000



S.W.L

GTWY6-2000/GTWY8-2000	300 kg
GTWY10-2000	250 kg
GTWY12-2000	200 kg



Working height

GTWY6-2000	8.00m
GTWY8-2000	10.00m
GTWY10-2000	12.00m
GTWY12-2000	14.00m
Platform floor height	
GTWY6-2000	6.00m
GTWY8-2000	8.00m
GTWY10-2000	10.00m
GTWY12-2000	12.00m



Overall length

GTWY6-2000/GTWY8-2000	1.56m
GTWY10-2000	1.79m
GTWY12-2000	1.84m

Overall width

GTWY6-2000/GTWY8-2000 / GTWY10-2000	0.84m
GTWY12-2000	0.89m

Overall height

GTWY6-2000/GTWY8-2000 / GTWY10-2000	1.86m
GTWY12-2000	2.08m

Platform size

GTWY6-2000/GTWY8-2000	1.21X 0.6m
GTWY10-2000/GTWY12-2000	1.45X 0.6m

Ground clearance

	0.08m
--	-------

Wheelbase

GTWY6-2000/GTWY8-2000	1.17m
GTWY10-2000/GTWY12-2000	1.42m



Lifting motor

AC	110-230VAC/1.5kw
DC	12VDC/2.5kw



Up/Down speed

GTWY6-2000	58/40 sec
GTWY8-2000	62/43 sec
GTWY10-2000	70/46 sec
GTWY12-2000	75/54 sec



Batteries	2X12V/150Ah
Integrated charger	12 V/15A



Tyres

Back wheels	φ200X50mm
Front wheels	φ180X50mm



Weight




GTWY6-2000	570(AC)/610(DC) kg
GTWY8-2000	630(AC)/670(DC) kg
GTWY10-2000	730(AC)/770(DC) kg
GTWY12-2000	825(AC)/865(DC) kg

Standard equipment

- Leveling outrigger device
- Emergency stop button
- Battery charge indicator
- Electric limit switch
- Two controllers operation
- Emergency down button
- Leveling indicator
- Over loading limited

GTWY6-2000	8m
GTWY8-2000	10m
GTWY10-2000	12m
GTWY12-2000	14m

GTWY6-2000	8m
GTWY8-2000	8m
GTWY10-2000	10m
GTWY12-2000	12m

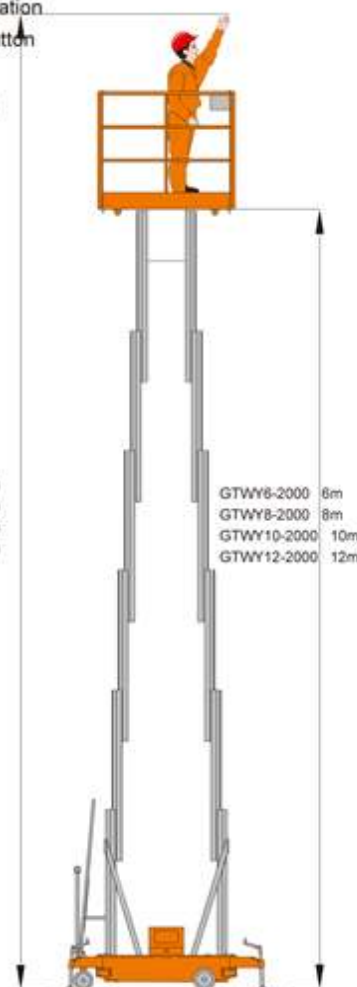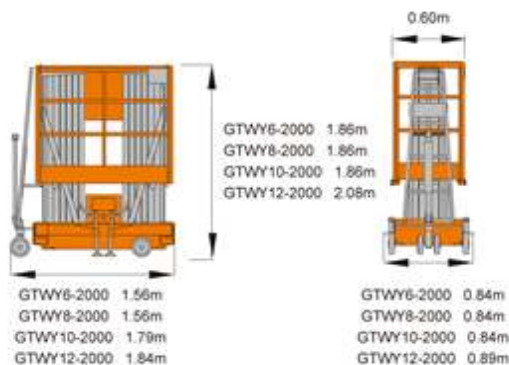

รายละเอียดผลิตภัณฑ์อาจมีการเปลี่ยนแปลงโดยมิได้แจ้งให้ทราบล่วงหน้า

Electric Scissor Lifts (I)

JCPT 8.0 , JCPT 9.5



รายละเอียดผลิตภัณฑ์อาจมีการเปลี่ยนแปลงโดยมิได้แจ้งให้ทราบล่วงหน้า

LIFTKAZ

Product Catalog

Email : sales@liftkaz.com

www.liftkaz.com



Electric Scissor Lifts I

JCPT(I)



Rails folded

JCPT8(I)/JCPT9.5(I)



S.W.L	
JCPT8(I)	450 kg
JCPT9.5(I)	400 kg
S.W.L on extension	112 kg




Working height	
JCPT8(I)	10.00m
JCPT9.5(I)	11.50m
Platform floor height	
JCPT8(I)	8.00m
JCPT9.5(I)	9.50m



Overall length	2.51m
Overall width	1.15m
Overall height	2.45m
Platform size	2.50 X 1.12m
Platform extension size	1.27m
Ground clearance	0.12m
Wheelbase	2.08m
Turning radius	
Inside/Outside	1.93/3.74m



Drive motors	2X24VDC/1.5kw
Lifting motor	24VDC/3kw



Travel speed	
Stowed	4 km/h
Raised	1.1 km/h
Up/Down speed	
JCPT8(I)	70/60 sec
JCPT9.5(I)	89/88 sec



Batteries	4X6V/250Ah
Integrated charger	24V/25A



Gradeability	35%
Maximum slope	3°



Tyres	φ406X125mm
-------	------------



Weight	
JCPT8(I)	2200kg
JCPT9.5(I)	2280kg


Standard equipment

- Can Bus Technology
- Proportional controls
- Automatic Pothole Protection
- Battery charge indicator
- Swing gate on platform
- Hour Meter
- Safety brackets
- Forklift pockets
- Fault indicator on platform
- Low voltage alarm
- Emergency down button
- Extended platform
- Charger protection
- Horn
- Tilt alarm
- Tilt protection
- Controller temperature protection
- Traction batteries with big capacity
- Over loading limited
- 2WD

Options

- AC power on the platform
- Flashing beacons

JCPT8(I) 8m	JCPT8(I) 10m
JCPT9.5(I) 9.5m	JCPT9.5(I) 11.5m

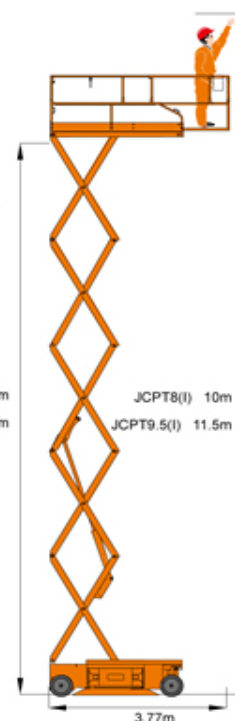

Electric Reach Forklift
EDQ 1000 EDQ 1200 EDQ 1500 EDQ 2000



รายละเอียดผลิตภัณฑ์อาจมีการเปลี่ยนแปลงโดยมิได้แจ้งให้ทราบล่วงหน้า

รายละเอียดผลิตภัณฑ์อาจมีการเปลี่ยนแปลงโดยมิได้แจ้งให้ทราบล่วงหน้า



TECHNICAL DATA			MODEL							
			EDQ 1030	EDQ 1045	EDQ 1230	EDQ 1245	EDQ 1530	EDQ 1545	EDQ 2030	EDQ 2045
Power			battery							
Operation			stand-on							
Load capacity	Q	kg	1000		1200		1500		2000	
Lift height	A	mm	3000	4500	3000	4500	3000	4500	3000	4500
Load centre		mm	500							
Fork carriage tilt (forward/backward)	α/β	(deg)	3 / 5							
Travel speed		km / h	7.7				8.8		8.5	
Lifting speed		mm / s	160		160		230		210	
Max gradeability (laden)		%	> 12						> 10	
Min turning radius	R	mm	1430		1500		1580		1700	
Reach distance	B	mm	550							
Service brake			mech							
Overall length	C	mm	1820				2187			
Overall width	D	mm	1020				1200			
Height of mast, lowered	H1	mm	2080	2185	2080	2185	2120	2205	2120	2205
Free lift height		mm	330							
Height of mast, extended	H2	mm	3945	5445	3945	5445	4000	5500	4000	5500
Height of overhead guard	E	mm	2260							
Fork dimensions		mm	35 × 100 × 1070				45 × 120 × 1070			
Min ground clearance		mm	80							
Aisle width (pallet 1000 × 100)	Ast2	mm	2430	2430	2500	2430	2700	2700	2820	2700
Service weight		kg	1700	1850	1800	1950	2550	2750	2800	3000
Drive motor		kw	2.2				3.7			
Lift motor		kw	2				8.2			
Battery (5h)	V / Ah		24 / 390				48 / 450			
Tyres			polyurethane/solid tyre							
Size of front tyre		mm	250 × 120							
Size of rear tyre		mm	380 × 120							
Size of balancing tyre		mm	170 × 70							
Turning system			mech				hyd			
Speed control system			CURTIS / ZAPI							
SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTICE										

Mini Electric Forklift



รายละเอียดผลิตภัณฑ์อาจมีการเปลี่ยนแปลงโดยมิได้แจ้งให้ทราบล่วงหน้า

Mini Electric Forklift

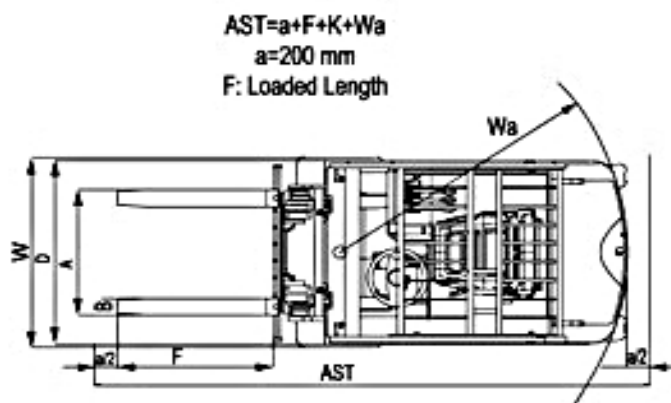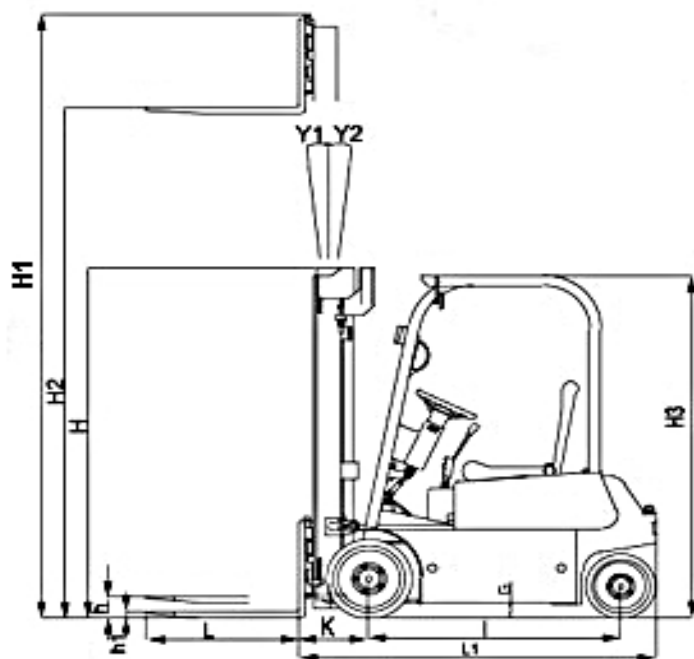

TECHNICAL DATA		Model		
		CPDM 05	CPDM 75	CPDM 100
Capacity	Q kg	500	750	1000
Load Center	C mm		400	
Lifting Height	H2 mm		3200	
Free Lifting Height	h mm		1600	
Tilting Angle	Y1 / Y2 (°)		2° / 5°	
Fork Length	L mm		800	
Fork Width	B mm		100	
Fork Width	A mm		220 - 680 (adjustable)	
Side Shift	a/2 mm		left / right 100	
Min.Turning Radius	Wa mm	1100	1260	1350
Lifting Speed	m / min		84 / 127	
Lowering Speed	m / min		adjustable	
Mast Height	h mm		1900	
Max lifting Height	H1 mm		3600	
Safe Guard Height	H3 mm		1900	
Wheel Base	mm		860-940	
Distance Front Between Wheels	mm		660	
Min. Clearance to the Ground	G mm	85	90	
Traveling Speed(with/without load)	m / min	6.5 / 7.8	6.5 / 7.3	6.5 / 7.0
Gradeability	(°)		8	
Battery	Ah / V	210 / 24	280 / 24	385 / 24
AST	mm		2365	
Driving motor	KW		2	
Pump motor	KW		2.8	
Wheel			Solid Rubber	
Front Wheels			Φ 267 X 127	
Rear Wheels			Φ 267 X 127	
Overall length	L1 mm		1260	
Overall width	W mm	820	820	900
Overall height	H mm		2100	
Net Weight	kg	1250	1380	1550

1000mm Fork is available.

SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTICE

รายละเอียดผลิตภัณฑ์อาจมีการเปลี่ยนแปลงโดยมิได้แจ้งให้ทราบล่วงหน้า

TOW TRACTOR XT-40



รายละเอียดผลิตภัณฑ์อาจจะมีการเปลี่ยนแปลงโดนมิแจ้งให้ทราบล่วงหน้า

TOW TRACTOR XT-40

รายละเอียดผลิตภัณฑ์อาจจะมีการเปลี่ยนแปลงโดนมิแจ้งให้ทราบล่วงหน้า

TECHNICAL DATA		Model
		XT40
Power supply		Battery
Operating Type		Sit-on
Max. Pulling (3min Rating)	N(kgf)	4000(400)
Rated Pulling (60min Rating)	N(kgf)	1000(100)
Traction Weight (60min Rating)	Kg	4000
Tyres Quantity Front/Rear		1/2x
Travel Speed - without load	km/h	13
Travel Speed - with load	km/h	8
Overall Length - with hook	mm	1728
Overall Length - without hook	mm	1592
Front Overhang	mm	266
Rear Overhang	mm	136
Overall Width	mm	858
Overall Height	mm	1245
Turn Radius	mm	1447
Hook Length	mm	136
Hook Height	mm	305/355
Wheels Base	mm	955
Tread Rear Wheel	mm	724
Ground Clearance	mm	85
Platform Height	mm	371
Total Weight - with battery	kg	812
Total Weight - without battery	kg	527
Tyre Dimension - Front Wheel		3.50-5-6PR
Tyre Dimension - Rear Wheel		4.00-8-6PR
Main Brake		Hydraulic
Hand Brake		Manual
Battery Voltage/Nominal Capacity	V/Ah	24/280
Battery Weight	kg	285
Driving Motor	KW	AC 3.0
Type of Drive Control		Mosfet Control
Specification is subject to change without notice		

MINI TOW TRACTOR XT-50

รถลากจูงไฟฟ้า Max. Load 4,000 Kg



รายละเอียดผลิตภัณฑ์อาจจะมีการเปลี่ยนแปลงโดยมิแจ้งให้ทราบล่วงหน้า

MINI TOW TRACTOR XT-50

รายละเอียดผลิตภัณฑ์อาจจะมีการเปลี่ยนแปลงโดยมิแจ้งให้ทราบล่วงหน้า

TECHNICAL DATA		Model
		XT50
Power supply		Battery
Operating Type		Sit-on
Max Traction weight	Kg	4000
Rated Pulling (60min Rating)	N(kgf)	1000
Wheels Base (± 5mm)	mm	955
Truck Weight (with battery) (± 10%)	Kg	783
Axle Loading unloaded (front/rear) (± 10%)	Kg	279/504
Tyres		Rubber
Sizes of front wheel	ø x 1mm	3.50-5-6PR
Sizes of rear wheel	ø x 1mm	4.00-8-6PR
Sizes of additional wheel	ø x 1mm	-
Wheel number(x=drive wheel) front/rear		1/2x
Tread, front	mm	0
Tread, rear	mm	724
Hook height	mm	305/355
Overall length (± 5mm)	mm	1728
Overall width (± 5mm)	mm	858
Ground Clearance (Treaded center) (Min.)	mm	85
Turning radius (Min.)	mm	1447
Drive speed unloaded/loaded	km/h	7/13
Platform Height	mm	371
Rated Pulling load/unload (60min Rating)	N(kgf)	1000
Max Pulling load/unload (5min Rating)	N(kgf)	4000
Max gardeability load/unload (5min Rating)	%	7/14
Brake type		Hydraulic
Battery voltage / nominal capacity	V/Ah	24/280
Battery Weight (± 10%)	Kg	285
Type of trailer coupling		Latch
Type of Drive Control		AC Curtis
Noise level at operator's ear	dB	<72
Specification is subject to change without notice		