

Semi Electric Pallet Truck

▲ Heavy Duty Design

▲ Brake system:


Integral electromagnetic disk brake mounted on motor shaft.

▲ Drive wheel:

complete gear train mounted on ball and roller bearing in oil bath housing. High-torque horizontally mounted motor has coppergraphite brushes for excellent fubrication.

▲ Load roller:

Tandem Polyurethane: $\Phi 78 \times 70 \text{mm}$.

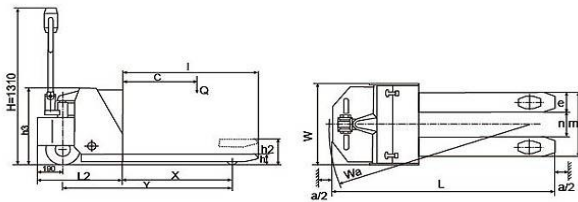

รายละเอียดผลิตภัณฑ์อาจมีการเปลี่ยนแปลงโดยมิได้แจ้งให้ทราบล่วงหน้า

TECHNICAL DATA		MODEL			
		SE15S	SE15L	SE20S	SE20L
Capacity	(kg)	1500		2000	
Max. Fork Height	h2 (mm)	205			
Min. Fork Height	h (mm)	85			
Fork Overall Width	m (mm)	520	680	520	680
Travelling Speed (With Load)	(km / h)	5			
Travelling Speed (Without Load)	(km / h)	6.5			
Overall Height	H (mm)	1310			
Overall Width	W (mm)	730			
Dimension	n (mm)	200	360	200	360
	h3 (mm)	620			
	Wa (mm)	1500			
Overall length	L (mm)	1800			
Fork Length	I (mm)	1150			
Load Centre	C (mm)	650			
Load distance	X (mm)	945			
Wheel Base	Y (mm)	1390			
Net Weight (without nattery)	(kg)	223	233	247	257
Drive Wheel, Ployurethane		Motor 1200W, Wheel $\Phi 250 \times 80 \text{ mm}$			
Battery (service free)	(Ah / V)	80 / 24			
Battery Charger	(A / V)	8 / 24			
Traction Battery (option)	(Ah / V)	—		165/24	
SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTICE					