

### Electric Stacker CDD10-070




#### Advantages:

##### Configuration And Performance

- Separately excited motor, Strong climbing ability.
- High strength forks.
- Built-in charger is standard.
- Automatic lifting limit, Motor and battery life extension.

##### Safety

- Stepless speed control system, safe and quiet.
- Controller with Multiple automatic protection.
- Emergency reversing device/Emergency brake switch.

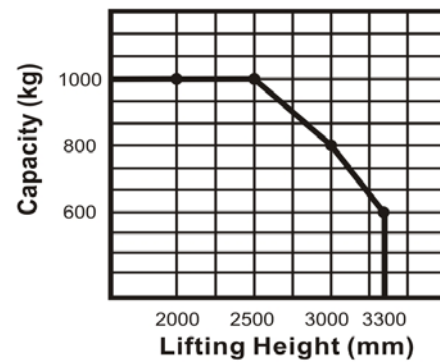

รายละเอียดผลิตภัณฑ์อาจมีการเปลี่ยนแปลงโดยมิได้แจ้งให้ทราบล่วงหน้า

### Full Electric Stacker CDD10-070

TECHNICAL DATA	MODEL CDD10-070	
Capacity	1000	Kg
Load center	600	mm
Operating type	Walkie	
Wheel base	1150	mm
Wheels type	PU	
Wheel quantity Driving wheel/Balance wheel / Bearing wheel	1/1/4	
Standard lift height	3300	mm
Max extend height	3685	mm
Mast extend height	2200	mm
Lowered fork height	90	mm
Fork size (length / width / thickness)	1220/185/55	mm
Overall length	1733	mm
Overall width	790	mm
Outside width between forks	685	mm
Inside width between forks	315	mm
Min Turning radius	1350	mm
Min. Aisle width for pallet 800x1200	1914	mm
Min. Aisle width for pallet 1000x1200	1955	mm
Min. Ground clearance	30	mm
Travel speed, laden/unladen	3/3.5	Km/h
Lift speed, laden/unladen	130/230	mm/S
Lowering speed, laden/unladen	130/230	mm/S
Gradient(with/without load)	5/7	%
Driving motor/Lift motor/Steering motor	DC0.63/DC2.0	KW
Brake	Electromagnetic / Regenerative	
Controller	CURTIS	
Battery(Voltage/Capacity)	24V 70Ah	V/Ah
Battery weight	48	Kg
Weight(with battery)	580	Kg

**SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTICE**

รายละเอียดผลิตภัณฑ์อาจมีการเปลี่ยนแปลงโดยมิได้แจ้งให้ทราบล่วงหน้า