


Full Electric Stacker With Straddle Leg WSL92-14 WSL94-16 WSL96-16

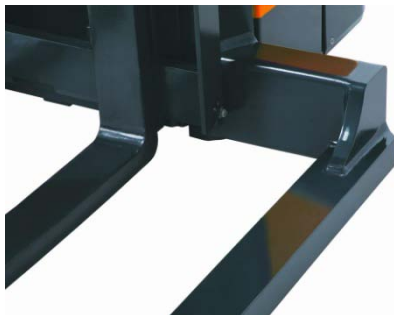

รายละเอียดผลิตภัณฑ์อาจมีการเปลี่ยนแปลงโดยมิได้แจ้งให้ทราบล่วงหน้า

Full Electric Stacker With Straddle Leg 1.4-1.6t รายละเอียดผลิตภัณฑ์อันท์อาจมีการเปลี่ยนแปลงโดยมิได้แจ้งให้ทราบล่วงหน้า

Characteristics					
1.1	Manufacturer		PE	PE	PE
1.2	Model designation		WSL 92-14	WSL 94-16	WSL 96-16
1.3	Drive unit		Battery	Battery	Battery
1.4	Operator type		Walkie/ Rider	Walkie/ Rider	Walkie/ Rider
1.5	Load capacity	Q (kg)	1400	1600	1600
1.6	Load center	c (mm)	600	600	600
1.9	Wheelbase	y (mm)	1310	1310	1375
Wheels, Chassis					
3.1	Tyre type		PU/PU	PU/PU	PU/PU
3.2	Tyre size, operator side (diameter x width)	mm	Φ248X75	Φ248X75	Φ248X75
3.3	Tyre size, load side (diameter x width)	mm	Φ84X70	Φ84X70	Φ84X70
3.4	Balance wheels (dimensions)	mm	Φ115X55	Φ115X55	Φ115X55
3.5	Wheels, number operator/load side (x=drive wheels)		1x+ 2/ 4	1x+ 2/ 4	1x+ 2/ 4
Dimensions					
4.2	Height, mast lowered	h_1 (mm)	1980/ 2135/ 2335/ 2500	1980/ 2135/ 2335/ 2500	2135
4.4	Lift height	h_3 (mm)	3000/ 3300/ 3600/ 4000	3000/ 3300/ 3600/ 4000	4000/ 4500/ 5000
4.5	Height, mast extended	h_4 (mm)	3500/ 3800/ 4100/ 4400	3500/ 3800/ 4100/ 4400	4500/ 5000/ 5500
4.9	Height of tiller arm in operating position, min/ max	h_{14} (mm)	1005/ 1450	1005/ 1450	1005/ 1450
4.10	Height of straddle arms or load wheel casing	h_8 (mm)	100	100	100
4.15	Fork height, lowered	h_{13} (mm)	85	85	85
4.19	Overall length (out leg/ fork)	l_1 (mm)	1995	1995	2055
4.20	Length to face of forks	l_2 (mm)	935	935	935
4.21	Overall width	b_1/ b_2 (mm)	1470	1470	1470
4.22	Fork dimensions	s/ e/ l (mm)	40/100/1050	40/100/1050	40/100/1050
4.24	Fork carriage width	b_3 (mm)	812	812	812
4.25	Outside fork width, minimum/ maximum	b_5 (mm)	812	812	812
4.26	Width between straddle arms	b_4 (mm)	1270	1270	1270
4.31	Ground clearance, laden, below mast	m_1 (mm)	50	50	50
4.32	Ground clearance, center of wheelbase	m_2 (mm)	50	50	50
4.33	Aisle width, 1000x1200 pallet crossways	A_{st} (mm)	2260	2260	2260
4.34	Aisle width, 800x1200 pallet lengthways	A_{st} (mm)	2230	2230	2230
4.35	Outer turning radius	W_a (mm)	1975/ 1565	1975/ 1565	2040/ 1630
Performance					
5.1	Travel speed, laden/ unladen	km/ h	3-5 / 3-5	3-5 / 3-5	3-5 / 3-5
5.2	Lifting speed, laden/ unladen	m/ s	0.13 / 0.23	0.13 / 0.23	0.13 / 0.23
5.3	Lowering speed, laden/ unladen	m/ s	0.13 / 0.23	0.13 / 0.23	0.13 / 0.23
5.8	Maximum gradeability, laden/ unladen S_2 5 min.	%	5/ 7	5/ 7	5/ 7
5.10	Service brake		Electromagnetic	Electromagnetic	Electromagnetic
Drive					
6.1	Drive motor rating S_2 60 min.	kW	1.5	1.5	1.5
6.2	Lift motor rating at S_3 15%	kW	3	3	3
6.4	Battery voltage/ rated capacity (5h)	V/ Ah	24/ 280	24/ 280	24/ 280
6.5	Battery weight (with box)	kg	228	228	228
	Battery compartment dimensions l/ w/ h	mm	650x248x550	650x248x550	650x248x550
	Battery type		Industry battery	Industry battery	Industry battery
Others					
8.1	Type of drive control		AC	AC	AC
	Manufacturer		CURTIS	CURTIS	CURTIS
8.4	Sound level at operator's ear	dB (A)	70	70	70
8.6	Steering		Power steering	Power steering	Power steering

*Special lifting height available

WS92-14

